

# Kima Warm Floor Mat 75

## Application:

Thin floor construction on top of an existing concrete floor construction in wet and dry areas.


Ordinary concrete constructions in wet and dry areas.

Under floor heating under wooden floor.

**Important! The heating cable can not be cut.**

## Specification:

- Flameretardent, twin conductor with no electromagnetic fields.
- Insulation class I
- IP67
- Operating temperature max +90°C
- Voltage 230 Volt
- Wattage 75 W/m<sup>2</sup>.
- Width 500 mm.
- 3 m coldtail with metallic sheath.
- Manufactured according to EN60335-1, EN60335-2-96.
- Complies with RoHs direktive 2002/95/EC

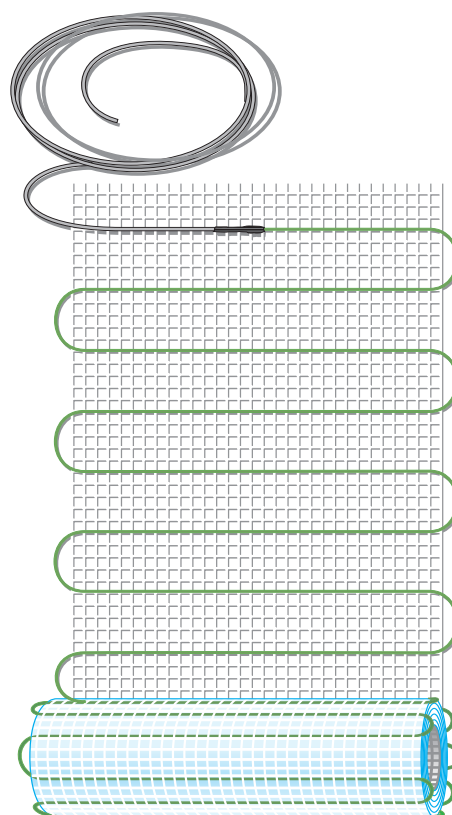

Part no.	EAN no.	Product Type	Width (mm)	Length (m)	Wattage (W)	Area (m <sup>2</sup> )	Tolerance total (Ohm)
10730201	7331002910015	KIMA WFM 75	500	2,0	75	1,0	670 - 776
10730202	7331002910022	KIMA WFM 75	500	3,0	115	1,5	437 - 506
10730203	7331002910039	KIMA WFM 75	500	4,0	150	2,0	335 - 388
10730204	7331002910046	KIMA WFM 75	500	5,0	190	2,5	265 - 306
10730205	7331002910053	KIMA WFM 75	500	6,0	225	3,0	223 - 259
10730206	7331002910060	KIMA WFM 75	500	7,0	265	3,5	190 - 220
10730207	7331002910077	KIMA WFM 75	500	8,0	300	4,0	168 - 194
10730208	7331002910084	KIMA WFM 75	500	10,0	375	5,0	134 - 155
10730209	7331002910091	KIMA WFM 75	500	12,0	450	6,0	112 - 129
10730210	7331002910107	KIMA WFM 75	500	14,5	550	7,2	91 - 106
10730211	7331002910114	KIMA WFM 75	500	16,0	600	8,0	84 - 97
10730212	7331002910121	KIMA WFM 75	500	21,0	790	10,5	64 - 74