

Kima Warm Floor Mat S 150

Application:


Underfloor heating in thin floor construction on top of an existing concrete floor construction in wet and dry areas.

Underfloor heating in ordinary concrete floor construction in wet and dry areas.

Important! The heating cable can not be cut.

Specification:

- Flameretardent, single conductor heating cable.
- Metallic Sheath, wire coverage.
- Insulation class I
- IP67
- Operating temperature max +70°C
- Voltage 230 Volt
- Wattage 150 W/m².
- Width 500 mm.
- 4 m coldtail in each end, with metallic sheath.
- Manufactured according to EN60800.
- Complies with RoHs directive 2002/95/EC

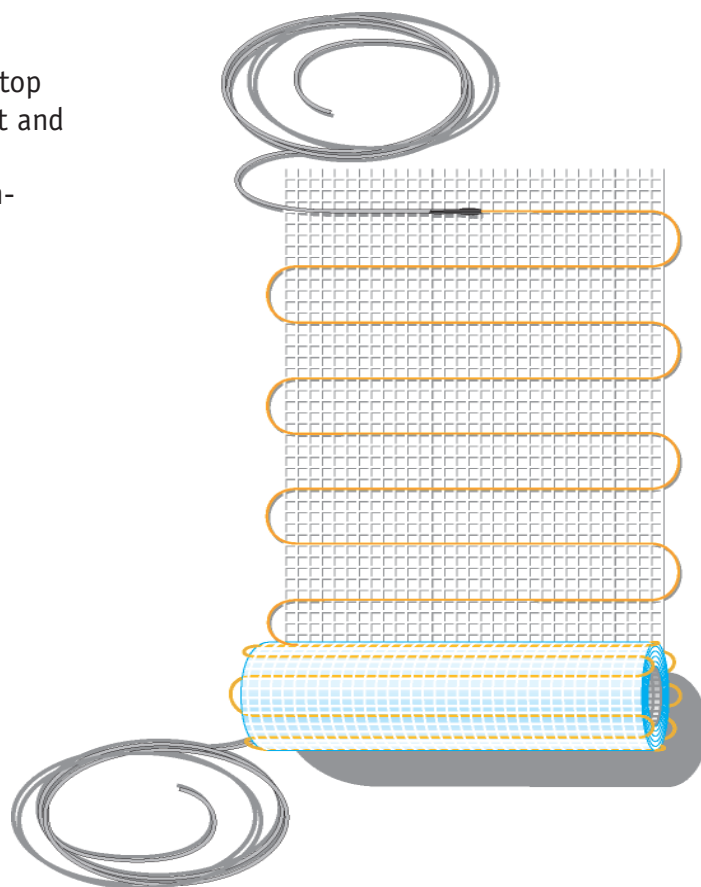

Part no.	EAN no.	Product Type	Length (m)	Wattage (W)	Area (m ²)	Tolerance total (Ohm)
107 401 01	7331002903215	KIMA WFMS 150	1,0	75	0,5	670 - 776
107 401 02	7331002903222	KIMA WFMS 150	2,0	150	1,0	335 - 388
107 401 03	7331002903239	KIMA WFMS 150	3,0	210	1,5	239 - 277
107 401 04	7331002903246	KIMA WFMS 150	4,0	290	2,0	173 - 201
107 401 05	7331002903253	KIMA WFMS 150	5,0	375	2,5	134 - 155
107 401 06	7331002903260	KIMA WFMS 150	6,2	465	3,1	108 - 125
107 401 07	7331002903277	KIMA WFMS 150	7,0	520	3,5	97 - 112
107 401 08	7331002903284	KIMA WFMS 150	9,2	700	4,6	72 - 83
107 401 09	7331002903291	KIMA WFMS 150	11,0	840	5,5	60 - 69
107 401 10	7331002903307	KIMA WFMS 150	13,0	980	6,5	51 - 59
107 401 11	7331002903314	KIMA WFMS 150	15,4	1180	7,7	43 - 49
107 401 12	7331002903321	KIMA WFMS 150	17,3	1300	8,6	39 - 45
107 401 13	7331002903338	KIMA WFMS 150	19,0	1400	9,5	36 - 42
107 401 14	7331002903345	KIMA WFMS 150	21,0	1580	10,5	32 - 37
107 401 15	7331002903352	KIMA WFMS 150	23,0	1700	11,5	30 - 34
107 401 16	7331002903369	KIMA WFMS 150	25,0	1875	12,5	27 - 31
107 401 17	7331002903376	KIMA WFMS 150	31,0	2350	15,5	21 - 25